

SIM Injector - More SIM, More Range



MobileMustHave
MOBILE LIFESTYLE SOLUTIONS

Use the SIM Injector to add another 8 SIM cards to your deployment, giving you the ability to connect to multiple carriers and ensuring that your connection remains unbreakable.

In addition to adding SIM capacity, the SIM Injector also adds 100 meters of flexibility between the Router and the SIM cards, enabling you to place the cellular router anywhere you want without worrying about changing SIM cards.


Finally, the SIM Injector uses an flexible architecture. You can connect multiple SIM Injectors to the HD2 Dome, and the device will have access to all the SIM cards carried by the SIM Injectors.

Extend up to
100m



Supports up to
8x
SIM Cards

Specifications

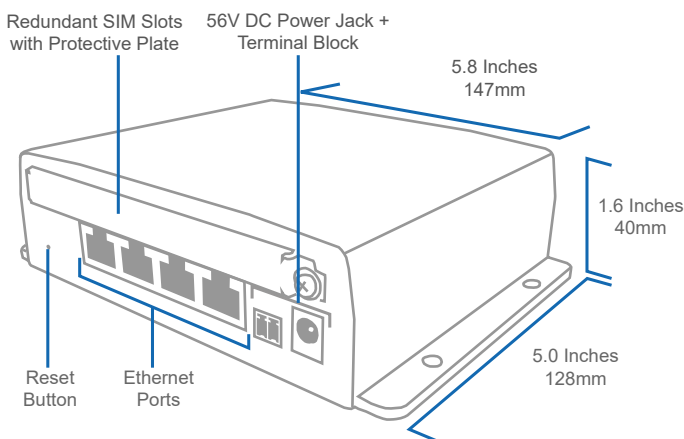

SIM Injector	
SIM Slots	8x Active SIM Slots, Standard Size
LAN Interface	4x GE, PoE 802.3at Support*
Power Input	DC Jack/Terminal Block: 12-56V
Dimensions	1.6 x 5.8 x 5 inches 40 x 147 x 128 mm
Weight	430 grams 0.94 pounds
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)

* 56V DC input is needed for 4x LAN ports to have 802.3at

Ordering Information - SIM Injector

Product Code	Description
SIM-BK8-4E-56V	SIM Injector, 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC