

Dawn

Assembly Instructions

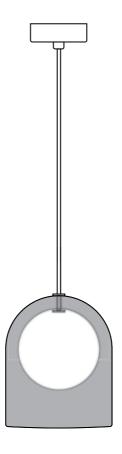

Dawn Pendant DA15

Dawn Assembly Instructions

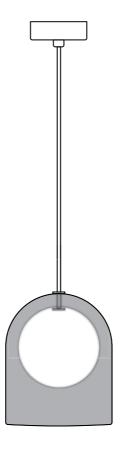

Components

A 1 x dawn pendant

B 1 x opal glass globe

C 1 x G9 LED Bulb

Dawn Assembly Instructions



Dawn comes fully assembled, simply mount the ceiling canopy to the desired location. Cord length is 3m, drop height is fully adjustable using the grub screw on ceiling canopy cord grip. In the event the bulb requires replacement please follow the below steps.

1



2

Ensure the light is turned off before replacing bulb. Do not pull down on the assembly. Carefully unscrew the inner glass globe anti-clockwise and remove.

Dawn Assembly Instructions



Gently pull the G9 bulb downwards out of the holder. Replace with a G9 LED bulb (Max. 6W).



4 Screw the inner glass globe back onto the fitting.

This installation guide will help your electrician simply and safely install your Dawn Pendant Light. Jardan carries out a test assembly prior to delivery, but please ensure that all necessary components are present and use this handbook as a reference throughout the installation process.

\wedge

IMPORTANT

Always shut off power to the circuit before starting installation work. This installation must only be done by a licensed electrician. Keep tools away from the surface to avoid scuffing and scratches. Jardan cannot be held responsible for any damage that occurs during installation.

Warranty and Care

- Made to last, our lighting is covered by a 1 year structural warranty.
- Wipe with a dry micro-fibre cloth only, ensuring light is turned off before proceeding.

Contact

For more information visit our website. If you can't find what you're looking for our friendly sales team will be happy to help, contact your nearest Jardan store.