



NXP (Freescale) S12/S12X (BDM) Mass ISP Programming

Application Note

DC04025

NanoPlex™ general description

NanoPlex NPS-06-01-04A Universal Relay ISP-Channel Multiplier allows the expansion of the number of channels of ISP-Programming tools, while also offering galvanic isolation. The total number of switched signals is 28. NanoPlex is used on PCBAs production lines, in ATE-controlled ISP programming. Thanks to its ultra-small size (only 51.0- x 66.5-mm), this NanoPlex model takes easily place in Test Fixtures. Designed for piggyback mounting, NanoPlex is universal and compatible with all types of ISP Programming tools.

Recommended Readings - Further Documentation

Before starting, please study the following essential papers:

- *NanoPlex NPS-06-01-04A Data Sheet*
- *NanoPlex NPS-06-01-04A Flexibility Application Note*

'*NanoPlex NPS-06-01-04A Flexibility Application Note*' clearly describes NanoPlex **modularity** and how to deploy **multiple units** in order to create high-density ISP Programming Multipliers with an **unlimited number of channels**.


NXP (former Freescale) S12/S12X (BDM)

Signals required for ISP Programming are:

- BKGD
- RESET

The most convenient way to ISP program multiple instances of this device through NanoPlex is using this model in **3x12 operating mode**. 3 NanoPlex input channels are multiplied to 12 separated, galvanic isolated output channels.

On the following mode examples diagram, NanoPlex signal names are assigned with aliases (texts are in **bold**).

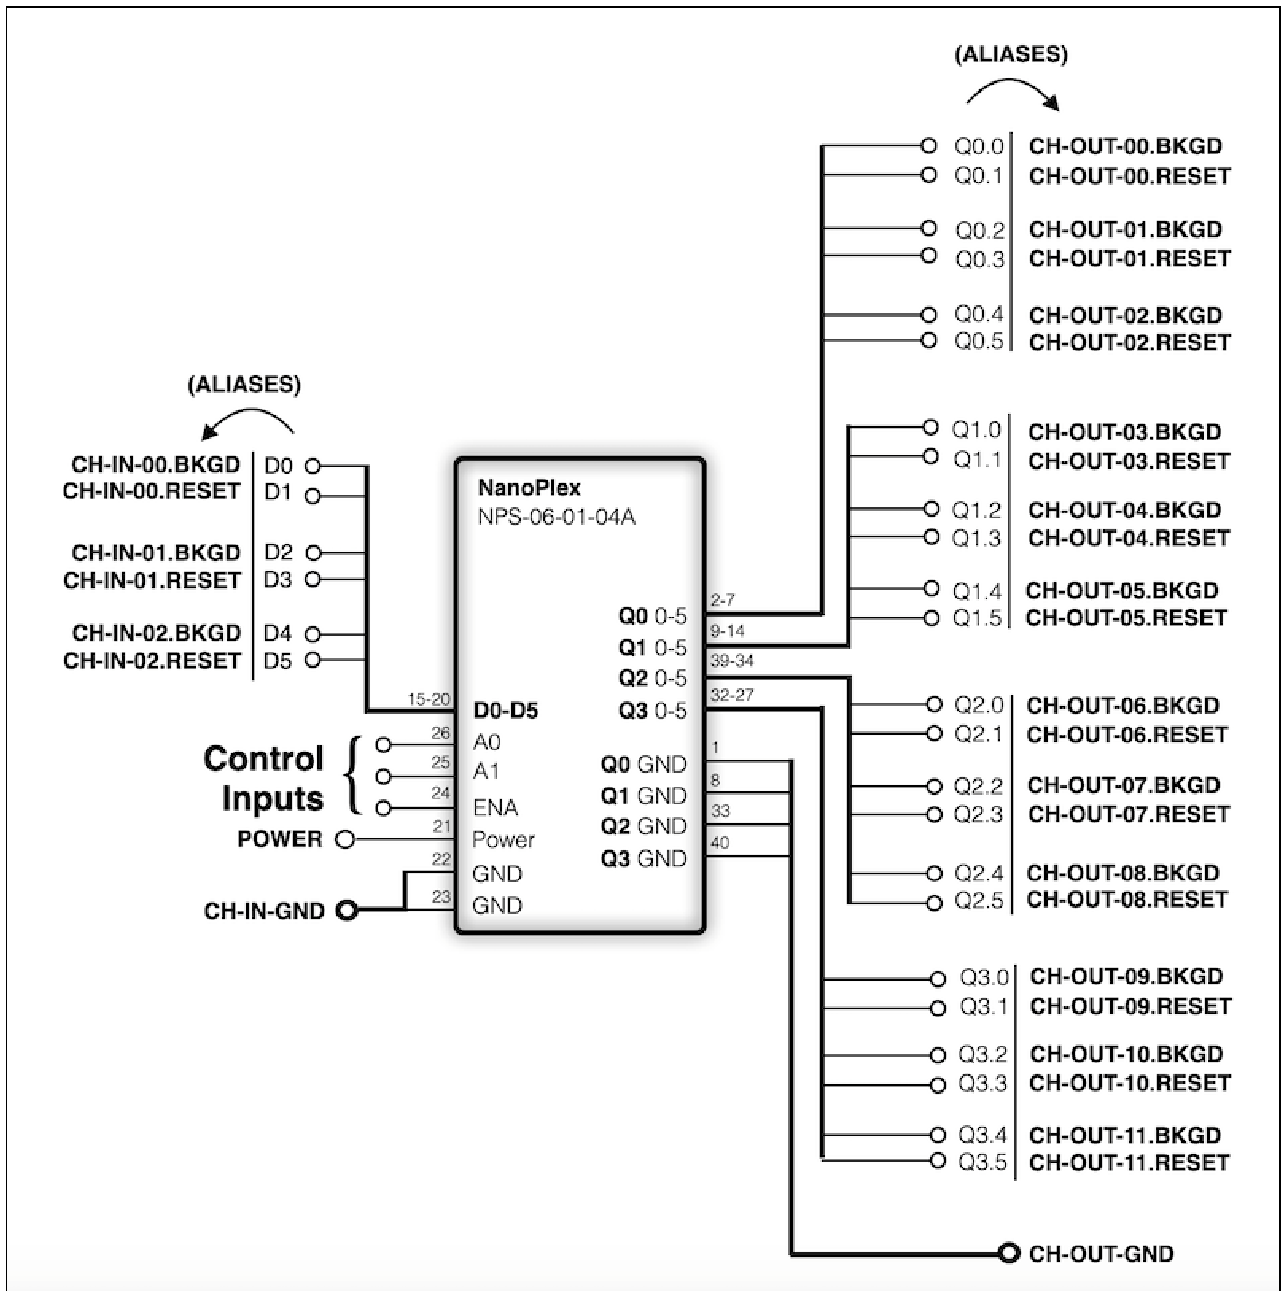

Truth table

(the symbol ► stands for “connected to”)

ENA	A1	A0	CH-IN-	00.BKGD ►	00.RESET ►	01.BKGD ►	01.RESET ►	02.BKGD ►	02.RESET ►
1	0	0	CH-OUT-	00.BKGD	00.RESET	01.BKGD	01.RESET	02.BKGD	02.RESET
1	0	1	CH-OUT-	03.BKGD	03.RESET	04.BKGD	04.RESET	05.BKGD	05.RESET
1	1	0	CH-OUT-	06.BKGD	06.RESET	07.BKGD	07.RESET	08.BKGD	08.RESET
1	1	1	CH-OUT-	09.BKGD	09.RESET	10.BKGD	10.RESET	11.BKGD	11.RESET
0	X	X	CH-OUT-	HI-Z	HI-Z	HI-Z	HI-Z	HI-Z	HI-Z

Operating sequence

ENA = 1

A1-A0 = "00"

CH-IN-00.BKGD ▶ CH-OUT-00.BKGD
CH-IN-00.RESET ▶ CH-OUT-00.RESET

CH-IN-01.BKGD ▶ CH-OUT-01.BKGD
CH-IN-01.RESET ▶ CH-OUT-01.RESET

CH-IN-02.BKGD ▶ CH-OUT-02.BKGD
CH-IN-02.RESET ▶ CH-OUT-02.RESET

A1-A0 = "01"

CH-IN-00.BKGD ▶ CH-OUT-03.BKGD
CH-IN-00.RESET ▶ CH-OUT-03.RESET

CH-IN-01.BKGD ▶ CH-OUT-04.BKGD
CH-IN-01.RESET ▶ CH-OUT-04.RESET

CH-IN-02.BKGD ▶ CH-OUT-05.BKGD
CH-IN-02.RESET ▶ CH-OUT-05.RESET

A1-A0 = "10"

CH-IN-00.BKGD ▶ CH-OUT-06.BKGD
CH-IN-00.RESET ▶ CH-OUT-06.RESET

CH-IN-01.BKGD ▶ CH-OUT-07.BKGD
CH-IN-01.RESET ▶ CH-OUT-07.RESET

CH-IN-02.BKGD ▶ CH-OUT-08.BKGD
CH-IN-02.RESET ▶ CH-OUT-08.RESET

A1-A0 = "11"

CH-IN-00.BKGD ▶ CH-OUT-09.BKGD
CH-IN-00.RESET ▶ CH-OUT-09.RESET

CH-IN-01.BKGD ▶ CH-OUT-10.BKGD
CH-IN-01.RESET ▶ CH-OUT-10.RESET

CH-IN-02.BKGD ▶ CH-OUT-11.BKGD
CH-IN-02.RESET ▶ CH-OUT-11.RESET

Connector pinout (aliases signals, top view)

Pin	Signal
01	CH-OUT-GND
02	CH-OUT-00.BKGD
03	CH-OUT-00.RESET
04	CH-OUT-01.BKGD
05	CH-OUT-01.RESET
06	CH-OUT-02.BKGD
07	CH-OUT-02.RESET
08	CH-OUT-GND
09	CH-OUT-03.BKGD
10	CH-OUT-03.RESET
11	CH-OUT-04.BKGD
12	CH-OUT-04.RESET
13	CH-OUT-05.BKGD
14	CH-OUT-05.RESET
15	CH-IN-00.BKGD
16	CH-IN-00.RESET
17	CH-IN-01.BKGD
18	CH-IN-01.RESET
19	CH-IN-02.BKGD
20	CH-IN-02.RESET

Signal	Pin
CH-OUT-GND	40
CH-OUT-06.BKGD	39
CH-OUT-06.RESET	38
CH-OUT-07.BKGD	37
CH-OUT-07.RESET	36
CH-OUT-08.BKGD	35
CH-OUT-08.RESET	34
CH-OUT-GND	33
CH-OUT-09.BKGD	32
CH-OUT-09.RESET	31
CH-OUT-10.BKGD	30
CH-OUT-10.RESET	29
CH-OUT-11.BKGD	28
CH-OUT-11.RESET	27
A0	26
A1	25
ENA	24
GND (*)	23
GND (*)	22
Power	21

(*) GND at pins 22/23 is used for both Power GND and CH-IN-GND.

Using multiple NanoPlex NPS-06-01-04A units

NanoPlex NPS-06-01-04A product is modular by design. Several units can be deployed in order to set-up a very large, limitless channel-multiplier. The advantage of using more units is a faster and less expensive substitution.

Please read '[NanoPlex NPS-06-01-04A Flexibility Application Note](#)' to discover how to set-up a switching system with the **number of channels as high as your application requires**.

About Manta Systems

Manta Systems is a high-tech company, global leader in high-density signal switching for In-System Programming (ISP) and Testing Systems. The company targets the electronic boards assembly market, where a high number of connections is required. Manta Systems flagship product is NanoPlex™, a series of Channels Multipliers for In-System Programming (ISP) and Testing instruments. NanoPlex is the **world's first universal tool** providing end-user with the possibility of having compact, easy-to-use, professional, reliable In-System Programming (ISP) and Testing Channel Multiplication functionality.

Warranty

All Manta Systems products are covered by a **three-year warranty** against defects and workmanship from the purchase date. The warranty only covers products when properly installed and used.

Orders

All NanoPlex™ Series products are generally **off-the-shelf**.

Shipping is within **24 hours** from order reception.

Free shipping & 30-day money back guarantee.

Disclaimer

Manta Systems is the owner of NanoPlex™ tradename. Manta Systems reserves the right to make improvements to NanoPlex™ Series and its documentation without notice. Information in this document is intended to be accurate and reliable. However, Manta Systems assumes no responsibility for its use; nor for any infringements of rights of third parties which may result from its use.

MANTA SYSTEMS WILL NOT BE LIABLE FOR DAMAGES RESULTING FROM LOSS OF DATA, PROFITS, USE OF PRODUCTS, OR INCIDENTAL OR CONSEQUENTIAL DAMAGES, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

Copyright © Manta Systems. All rights reserved.

NanoPlex™ is a tradename of Manta Systems.

All other product or service names are the property of their respective owners.

www.mantasys.com

info@mantasys.com

