MAX HD4 MBX Upgradable Quad-Cellular Gigabit LTE Powerhouse



Quad Cellular Bandwidth Bonding



The HD4 MBX is capable of combining the bandwidth of up to 4 cellular links into an unbreakable, high-speed SD-WAN connection. The HD4 MBX supports up to 8 SIM cards, with room for another 8 with the optional SIM Injector. With up to 16 cellular providers to connect to, spotty coverage will simply not be a problem.



Ready for any Environment

The HD4 MBX is designed for industrial usage. With its fanless design, it thrives in high-particle environments that would break other fan-based routers. The HD4 MBX also comes with 8x 802.3at PoE outputs to power your IP phones, cameras, and access points. Finally, the MBX has the same dimensions as the previous HD4, so it can fit seamlessly into any of your previous deployments.








IP Phones Surveillance Access Points



Fanless Design

Ready to Move



The HD4 MBX comes with multiple features to make it ideal for on-the-go deployments. Ignition Sensing gives it the ability to turn on and off depending on whether the vehicle has started. Upon vehicle shutdown, the MBX can also shut down after a user-defined interval, saving the battery from excessive drain.

The HD4 MBX supports the optional SIM Injector, which adds another 8 cellular providers to connect with. This mitigates weak spots in cellular coverage, ensuring consistent connectivity . If your deployment crosses national boundaries, you can also use the SIM Injector to load multiple SIM cards, preventing roaming charges. Finally, the HD4 MBX has rolling stock certification, meeting the strictest requirements of transportation deployments.

Gigabit LTE Ready for 5G

Right out of the box, the HD4 MBX supports Gigabit LTE. For future technologies, the MBX features a swappable cellular module, so when you need to upgrade to 5G, you can simply swap your old one with a new one. The MBX is also capable of 2.5Gbps of throughput, giving you plenty of bandwidth for Gigabit Ethernet, 5G, or any future mobile technologies. 2.5Gbps also gives your wired connections plenty of room to operate in concert with wireless connections, building network resilience and ensuring that your branch office stays up.

Upgradable Cellular Module, 5G.



MAX HD4 MBX

Upgradable Multi-Cellular Gigabit LTE Powerhouse **Specifications**

_		
		MAX HD4 MBX (CAT-12)
		2x USB Interface
	WAN Interface	3x GE*
	LAN Interface	4x Embedded LTE-A Pro Modems with Redundant SIM Slots 9x GF*
	LAN Intenace	9X GE 802.11ac/a/b/g/n, 1166 Mbps 2x2 MIMO Wi-Fi WAN and/or AP
	Wi-Fi Interface	Simultaneous Dual-Band
	Router Throughput	2.5 Gbps
	Number of PepVPN SpeedFusion Pee	ers 2/20/50^
	PepVPN Throughput (No Encryption)	600 Mbps
	PepVPN Throughput (256-bit AES)	500 Mbps
	LTE-A Pro Modems	4x Modems, Downlink/Uplink Per Modem: 600 Mbps/150 Mbps
	Recommended Users	50-500
	Cellular and GPS	8x SMA Antenna Connectors
	Antenna Connector	1x SMA GPS Antenna Connector 4x RP-SMA Wi-Fi Antenna Connectors
	B	4x RP-SMA WI-FI Antenna Connectors
	Power Input Power Output	Up to Eight 802.3at PoE Outputs [#]
	Power Consumption	55 W (max.)
	Power Consumption	
	Dimensions	2.0 x 11.5 x 7.0 inches 50 x 292 x 177 mm
		7.28 pounds
	Weight	3.3 kg
		-40 ° – 149 °F
	Operating Temperature	-40 ° – 65 °C
	Humidity	15% – 95% (non-condensing)
		FCC, CE, RoHS, RCM, E-Mark, PTCRB,
	Certifications	Shock and Vibration Resistance: EN 61373:1999 IEC 61373:1999
	Certifications	Railway Applications: EN 50155
		Electromagnetic Compatibility: EN 61000
	Warranty	1-Year Limited Warranty
		MAX HD4 MBX, 1x PSU 180W (ACW-630), 4x Wi-Fi Dual Band Antenna (ACW-341), 1x GPS Antenna (ACW-232), LTE/5G Antennas (ACW-234), 1 Pair of Mounting Brackets (ACW-513), 3pin Terminal Block Connector (Ignition sense), 4pin Terminal Block Connector (Power supply),
		Grounding cable, Rubber Foot Pad set

HD4 MBX (CAT-12) 2 inches 50 mm 11.5 inches 292 mm 7 inches 177 mm RP-SMA Wi-Fi WAN 1x GE Ethernet RP-SMA Wi-Fi AP WAN/ LAN* Antenna Connectors Antenna Connectors 0 🔕 wifi 🗞 FT TTT 2x GE 8x GE LAN with 2x USB Ethernet WAN 802.3at PoE Output# WAN Ports SMA GPS Antenna SMA Cellular Connector Antenna Connectors 4x Embedded Cellular Modems 12-56V DC 4x Redundant SIM Slots Terminal Block 2x 54V DC

MöbileMustHave

MOBILE LIFESTYLE SOLUTIONS

* WAN 3 is configured as a LAN port by default, configuration is changeable on the Web Admin

2x 54V DC input is needed for all 8x LAN ports to have 802.3at PoE. Plugging in 1x 54V DC input will result in 4x LAN ports having 802.3at PoE.

Ignition

Sense PIN

Connectors

^ With purchase of optional SpeedFusion License (MAX-HD-020-SPF/ SFN-LC-50) can connect to up to 20/50 SpeedFusion peers respectively.

	Product Code	Description	Carrier/ Category	Embedded Modems	4G Bands	3G Bands
LTE-A	MAX-HD4-MBX-LTEA-R-T	Includes 1x 54 V Power Supply and PoE License. Enables 4x 802.3at PoE Output Ports	America / FirstNet / CAT-12	4	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13 <mark>, B14</mark> , B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66	B1, B2, B4, B5, B6, B8, B9, B19
Pro	MAX-HD4-MBX-LTEA-K-T	Includes 1x 54 V Power Supply and PoE License. Enables 4x 802.3at PoE Output Ports	Global*/ CAT-12	4	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, <mark>B28</mark> , B29, B30, B32, B41, B42, B43, B46, B48, B66	B1, B2, B4, B5, B6, B8, B9, B19

* China & HK TD LTE are excluded.

Ordering Information

Custom Options

Product Code	e	Description
ACW-630		Includes 1x 54V, 3.34A Power Supply Enable 4x LAN with 802.3at PoE output (PoE License automatically applied after kit purchase)
ACW-633		Includes 2x 54V, 3.34A Power Supply Enables 8x LAN with 802.3at PoE output (PoE License automatically applied after kit purchase)
MAX-HD-020)-SPF	Supports up to 20 PepVPN/SpeedFusion Peers
SIM-BK8-4E-	-56V	SIM Injector, 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC
SFN-LC-50		Up to 50 SpeedFusion Bonding License Key for MAX HD4 MBX
ANT-MB-400	G-S-W-6	5-in-1 Cellular Antenna System with GPS Receiver (White)
ANT-MB-400	G-S-B-6	5-in-1 Cellular Antenna System with GPS Receiver (Black)
ANT-MB-420	G-S-W-6	7-in-1 Cellular and Wi-Fi Antenna System with GPS Receiver (White)
ANT-MB-420	G-S-B-6	7-in-1 Cellular and Wi-Fi Antenna System with GPS Receiver (Black)
ANT-MB-02-I	R-W-6	2x2 MIMO Wi-Fi Dual Band Antenna (White)
ANT-MB-02-	R-B-6	2x2 MIMO Wi-Fi Dual Band Antenna (Black)

MAX HD2/HD4 MBX Upgradable Multi-Cellular Gigabit LTE Powerhouse

Specifications

CAT-12

WAN Interface	HD2 / HD4 MBX (CAT-18) 2x USB Interface 3x GF*
WAN Interface	
WAN Interface	
	HD2 MBX: 2x Embedded LTE-A Pro Modems with Redundan HD4 MBX: 4x Embedded LTE-A Pro Modems with Redundan
LAN Interface	9x GE*
Wi-Fi Interface	802.11ac/a/b/g/n, 1166 Mbps 2x2 MIMO Wi-Fi WAN and Simultaneous Dual-Band
Router Throughput	2.5 Gbps
Number of PepVPN SpeedFusion PepVPN Throughput (No Encrypt	
PepVPN Throughput (256-bit AES	S) 500 Mbps
LTE-A Pro Modems	Downlink/ Uplink Data rate: 1.2 Gbps/150 Mbps
Recommended Users	50-500
Cellular and GPS Antenna Connector	HD2 MBX: 8x SMA Antenna Connectors + 1x SMA GPS Antenna Connector HD4 MBX: 16x QMA Antenna Connectors + 1x QMA GPS Antenna Connector 4x RP-SMA Wi-Fi Antenna Connectors
Power Input	DC Jack/ Terminal Block: 12-56 V#
Power Output	Up to Eight 802.3at PoE Outputs#
Power Consumption	55 W (max.)
Dimensions	2.0 x 11.5 x 7.0 inches 50 x 292 x 177 mm
Weight	7.28 pounds 3.3 kg
Operating Temperature	-40 ° – 149 °F -40 ° – 65 °C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS, E-Mark, PTCRB, Shock and Vibration Resistance: EN 61373:1999 IEC 613 Railway Applications: EN 50155 Electromagnetic Compatibility: EN 61000 ESN (Emergency Services Network)
Warranty	1-Year Limited Warranty
Package Content MAX HD2 MBX (CAT-18)	MAX HD2 MBX, 1x PSU 180W (ACW-630), 4x Wi-Fi Dual Band Antenna (ACW-341), 1x GPS Antenna (8x LTE/5G Antennas (ACW-234), 1 Pair of Mounting Brackets 3pin Terminal Block Connector (Ignition sense), 4pin Terminal Block Connector (Power supply), Grounding cable, Rubber Foot Pad set
Package Content MAX HD4 MBX (CAT-18)	MAX HD4 MBX, 1x PSU 180W (ACW-630), 1x QMA to SMA Adaptor (for GPS), 1x GPS Antenna (AC' 1 Pair of Mounting Brackets (ACW-513), 4x Wi-Fi Dual Band Antenna (ACW-341), 3pin Terminal Block Connector (Ignition sense), 4pin Terminal Block Connector (Power supply), Grounding cable, Rubber Foot Pad set

Ordering Information

	Product Code	Description	Carrier/ Category	Embedde Modems
LTE-A	MAX-HD2-MBX-GLTE-G-T	Includes 1x 54 V Power Supply and PoE License. Enables 4x 802.3at PoE Output Ports	Global / ESN / CAT-18	2
Pro	MAX-HD4-MBX-GLTE-G-T	Includes 1x 54 V Power Supply and PoE License. Enables 4x 802.3at PoE Output Ports	Global / ESN / CAT-18	4

Custom Options

Product Code	Description
ACW-630	Includes 1x 54V, 3.34A Power Supply Enable 4x LAN with 802.3at PoE output (PoE License au
ACW-633	Includes 2x 54V, 3.34A Power Supply Enables 8x LAN with 802.3at PoE output (PoE License a
MAX-HD-020-SPF	Supports up to 20 PepVPN/SpeedFusion Peers
SIM-BK8-4E-56V	SIM Injector, 8x SIM cards capacity, 4x 10/100/1000 LAN
SFN-LC-50	Up to 50 SpeedFusion Bonding License Key for MAX HE
ANT-MB-42G-S-W-6 for HD2 MBX CAT-18	7-in-1 Cellular and Wi-Fi Antenna System with GPS Rece
ANT-MB-42G-S-B-6 for HD2 MBX CAT-18	7-in-1 Cellular and Wi-Fi Antenna System with GPS Rece
ANT-MB-42G-Q-W-6 for HD4 MBX CAT-18	7-in-1 Cellular and Wi-Fi Antenna System with GPS Rece
ANT-MB-40G-Q-B-6 for HD4 MBX CAT-18	5-in-1 Cellular Antenna System with GPS Receiver (Whit
ANT-MB-40G-Q-W-6 for HD4 MBX CAT-18	5-in-1 Cellular Antenna System with GPS Receiver (Blac

peplink PEPWAVE

peplink PEPWAVE

©Pepwave. All rights reserved. Ref. no: max-hd4-mbx-202108-rev19.d



utomatically applied after kit purchase)

automatically applied after kit purchase)

N ports, 56V DC HD2/HD4 MBX ceiver (White) ceiver (Black) ceiver (White) ite) ck)

www.peplink.com


Branch Office Network Resilience





With SpeedFusion Bandwidth Bonding, the HD4 MBX is capable of combining the bandwidth of 4x Gigabit LTE connections into a fast and reliable SD-WAN connection. This means that even if your wired connections go down, the HD4 MBX will still keep your office connected. When you need to upgrade to 5G, simply swap the cellular module and the router is ready, it's that easy.

The HD4 MBX supports up to 8x 802.3at PoE connections, enabling you to connect your IP phones, IP cameras, and access points with minimal cabling. It also delivers 802.1ac dual-band dual-radio Wi-Fi with a customizable captive portal for guest access. The HD4 MBX comes equipped with SpeedFusion WAN Smoothing, mitigating packet loss and ensuring that your videoconferences are jitter-free. For multi-branch deployments, all our devices support InControl cloud management for easy SD-WAN provisioning, and group-based updates and configuration.

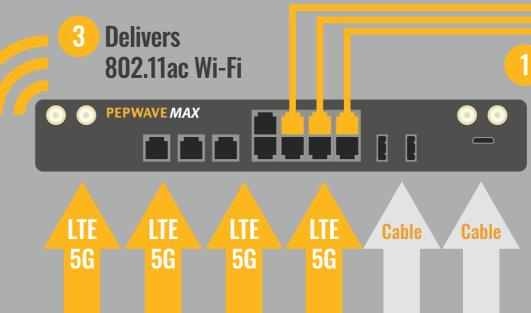



Add the reliability of 4x cellular links to your VPN. Upgrade to 5G when needed.


Wi-Fi Connectivity for Employee Shuttles



SpeedFusion SD-WAN combines the bandwidth of 4x Gigabit LTE connections on a packet level, ensuing employee productivity remains uninterrupted when cellular connections break. The MBX has swappable cellular modules, so when 5G technology comes, simply insert the 5G module and you are set.


The HD4 MBX can deliver 8x 802.3at PoE outputs, it also supports 802.11ac dual-band dual-radio Wi-Fi with a customizable captive portal. The HD4 MBX supports ignition sensing: the ability to turn on and off based on the ignition status of the vehicle.

Our ecosystem has other services to meet the challenges of employee bus deployments. Use the SD-PMU to regulate voltage and manage power delivery from the cloud. Using our Smart Readers and TA app, you can control bus access and track employee usage. Using InControl, you can remotely configure your devices and monitor your entire fleet on a real-time map as needed.

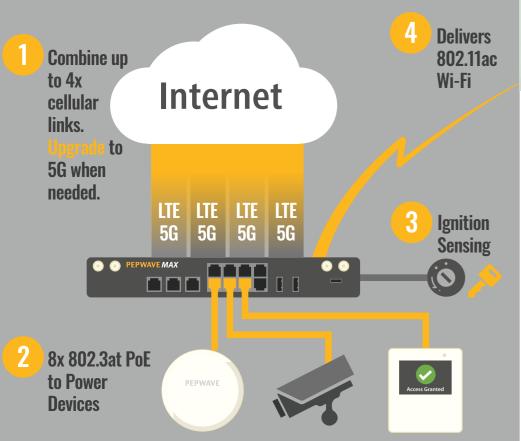



In-Vehicle Power Management: SD Power Management Unit



Voltage regulation and boost, monitor battery health on the cloud, low power disconnect.

Employee and Capacity Tracking: Time and Attendance System



Track bus access using RFID cards. Review usage records on the TA cloud platform.



peplink **PEPWAVE**

Rolling Stock Certification

EN 61373:1999 IEC 61373:1999 EN 50155 EN 61000

Remote Config & Fleet Tracking: InControl Cloud Management



Track your entire fleet on a single map. Standardize router and Wi-Fi configuration.

Public Safety - Mobile Command










Instant Connectivity for Temporary Sites





The HD4 MBX provides you with instantly deployable connectivity, available right when the first boots hit the ground. By combining the bandwidth of up to 4x Gigabit LTE connections, you can perform fast and reliable connectivity no matter where the site is located. Quickly and safely transmit project data, emails, plans, and blueprints between personnel, sutes, and headquarters. The HD4 MBX also has an upgradable cellular module, so 5G connectivity is as simple as switching the module. Together, these features can save months of lead time.

The HD4 MBX supports 8x 802.3at PoE ports to power your IP phones, cameras, and access points, simplifying your cabling. It can also deliver secure 802.11ac Wi-Fi with a customizable captive portal for staff and guests to connect to. For additional network reliability, the optional SIM injector adds another 8x SIM cards to your deployment.

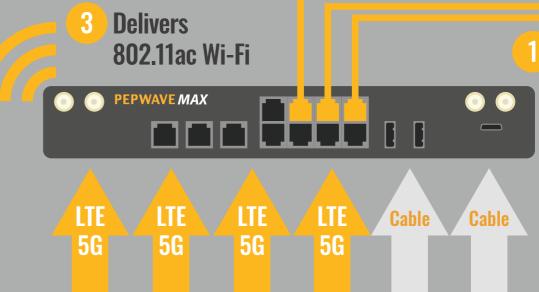





Add the reliability of 4x cellular links to your VPN. to 5G when needed.

Event Live Streaming and Connectivity





Keep your event connected and your cameras streaming. With support for 4x Gigabit LTE connections, the HD4 MBX can keep your event connected no matter where it is held. It also has a modular cellular modem, so it's ready to upgrade to 5G anytime you are. The HD4 MBX has 8x 802.3at PoE ports, so you can simplify your cabling when connecting and powering your devices. It can deliver 802.11ac Wi-Fi which supports a customizable captive portal with advertisements. The captive portal and advertisements work with any connected access points as well.

By adding a video encoder to your deployment, you could also connect cameras for your event, ensuring that it has good online coverage. The cellular SpeedFusion SD-WAN connection provides all the bandwidth you need to stream HD video. What's more, our patented WAN Smoothing technology compensates for packet loss, ensuring smooth, jitter-free streaming.

Delivers adsupported 802.11ac Wi-Fi with a customized captive portal.



💿 💿 PEPWAVE MAX

LTE

5G


LTE

5G










Combine bandwidth of 4x cellular links. to 5G when needed.

Mobile Clinic - Telemedicine





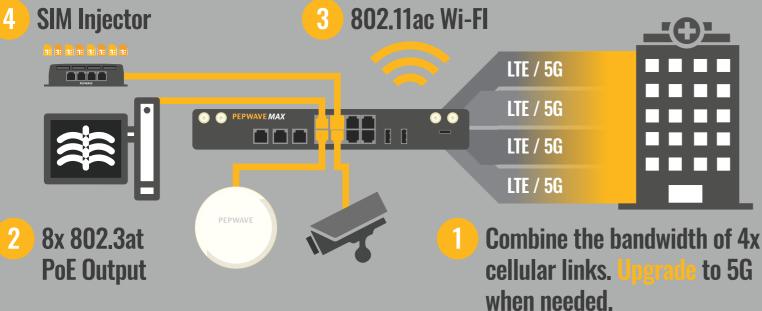

Telemedicine has the potential to improve the lives of many patients, particularly those living in remote locations without access to specialist doctors. However, x-ray images and videostreams require large amounts of data, more data than a single cellular link can transfer in a timely manner. Our Solution: SpeedFusion SD-WAN. Using this technology, the HD4 MBX can combine the bandwidth of 4x Gigabit LTE connections to form a fast and reliable VPN connection that can handle the requirements of remote diagnosis. The MBX has a modular cellular modem, so it can upgrade to 5G whenever you are ready.

The HD4 MBX can support 8x 802.3at PoE Outputs to power your IP phones and access points. It can also deliver 802.11ac Wi-Fi to offer hotspots for staff and guests. For mobile medical facilities, the HD4 MBX has ignition sensing, which can turn the router on or off based on the ignition status of the vehicle. The HD4 also supports the optional SIM Injector, which can add another 8x SIM cards to the deployment, adding resiliency and carrier coverage to your mobile medical facility.



