HDT DOME PTO 5 Cellular Router for outdoor deployments

peplink

A refinement in outdoor interconnectivity

The HD1 Dome Pro adapts to the flexible nature of outdoor deployments, offering powerful speeds, with refined Wi-Fi options. The **5G modem**, with its **embedded cellular antennas**, ensures minimal cable loss and offers the finest signal quality.





MôbileMustHave MOBILE LIFESTYLE SOLUTIONS









peplink


Instant **flexibility** with the SIM injector.

Simply connect an Ethernet cable between the SIM injector[^] and the HD1 Dome Pro to manage up to **10 physical SIMs**.

With remote network management available via Peplink's cloud-based management system, InControl2, accessibility worries are a thing of the past.

SIM Injector Specifications

SIM Slots LAN Interface Power Input Dimensions 8x Active SIM Slots, Standard Size 4x GE, PoE 802.3at Support DC Jack / Terminal Block: 12-56V 1.6 x 5.8 x 5 inches / 40 x 147 x 128 mm Weight Operating Temperature Humidity



-40 - 149 °F / -40 - 65 °C


15% - 95% (non-condensing)







The HD1 Dome Pro can **optimize network** performance with its PoE functionality. Leverage the power of SpeedFusion by simply connecting Peplink PoE routers, for a mega-bandwidth channel, with the simplest failover option. Or alternatively, extend the Wi-Fi range by connecting an external access point.




A design that's made to meet your needs



Mounting Bracket

MAX HD1 Dome Pro



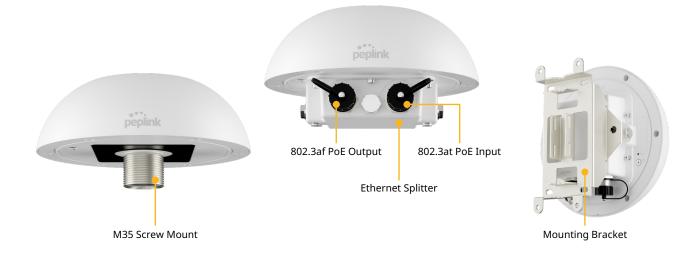

Specifications

WAN Interface	1x 5G Modem with Redundant SIM Slots ¹	Power Consumption	20 W (max., without PoE output)
LAN Interface	1x 10/100/1000M Ethernet ²	Dimension	4.33 inches (radius) x 4.53 inches (height) 110 mm (radius) x 115 mm (height)
Wi-Fi Interface	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MIMO Wi-Fi WAN and/or AP	Weight	With Ethernet Splitter: 3.75 pounds / 1.7 kg Without Ethernet Splitter:
Number of PepVPN SpeedFusion Peers	2		2.65 pounds / 1.2 kg
Enclosure	Rugged outdoor IP67 (with Ethernet	Operating Temperature	-40°– 149°F / -40°– 65°C
Liiciosure	Splitter)	Humidity	15% – 95% (non-condensing)
Recommended Users	150	Certifications	FCC, CE, RoHS ³ , Electromagnetic Compatibility: EN 61000 ³
Cellular Data Rate (Downlink / Uplink)	5G: 4 Gbps / 700 Mbps LTE CAT-20: 2 Gbps / 150 Mbps	Package Content	MAX HD1 Dome Pro, Ethernet Splitter,
Antenna	4X4 Internal MIMO Cellular Antennas 2X2 Internal MIMO Wi-Fi Antennas 1x Internal GPS Antenna		2x Waterproof Ethernet Connector (ACW-112), Mounting Kit Set
Power Input	1x 802.3at PoE+	SIM Card Size	Nano-SIM (4FF)
· · · · · · · · · · · · · · · · · · ·		Warranty	1-Year Limited Warranty



¹SIM Injector is available separately. ²Ethernet LAN port can be split into two LAN ports using the included splitter (1x LAN 802.3af PoE out, 1x LAN 802.3at PoE+ in) ³Certification Pending.

MAX HD1 Dome Pro



Ordering Information

Product Code

MAX-HD1-DOM-PRO-5GD Embedded Modem(s): 1x 5G

MAX-HD1-DOM-PRO-5GH

Embedded Modem(s):

1x 5G

Regions

Primary: APAC, EMEA Compatibility: Global

Primary: North America*

AT&T(Pending), T-Mobile(Pending), Verizon(Pending)

Compatibility: Global

*US Carrier Certifications:

5G Bands

5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n20, n28, n38, n41, n66, n71, n77, n78, n79

5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n28, n41, n66, n71, n77, n78, n79

LTE Bands

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46, B48, B66, B71

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46, B48, B66, B71

Featured Add-on

Product Code

Description

SIM-BK8-4E-56V-DOM

MAX HD1 Dome Pro Bundle Offer - SIM Injector , 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC

