

# SYMMETRY Product Specifications

160 Watts

SY2-M160W/LH4

The Symmetry range of small area modules are perfect for use in a wide variety of low power solar PV systems. Available in a range of sizes from 5 watts up to 160 watts, the Symmetry range uses mono-crystalline, weatherproof A grade solar cells in a robust aluminium frame.

## Features:

### ■ 5 Busbar Cell

5 busbar solar cells improve the efficiency of modules, offer a better aesthetic appearance.

### ■ High Efficiency

High module conversion efficiency, through innovative manufacturing technology.

### ■ Low-Light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.

### ■ Severe Weather Resilience


Certified to withstand - wind load (2400Pa) and snow load (5400Pa).

### ■ Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV.

### ■ 0-+5W Positive Tolerance

Detailed information in Electrical Specifications.

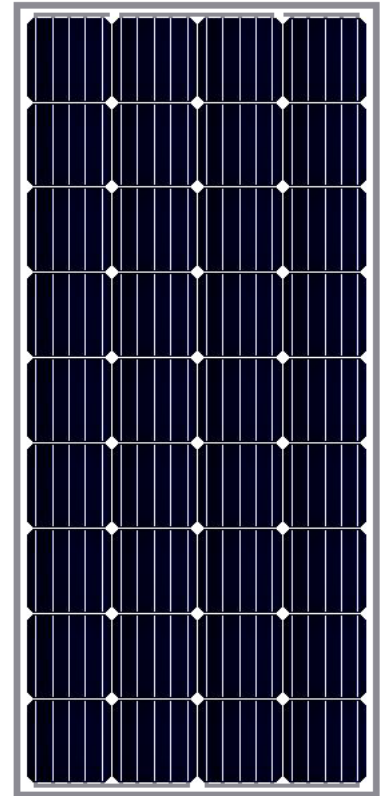

## Electrical Specifications

Model Number	SY2-M160W/LH4
<i>* STC: irradiance 1000/m<sup>2</sup>. AM1.5G &amp; Cell Temperature</i>	
Peak Power – Pmax (W)	160
Max. Power Voltage – Vmp (V)	18.44
Max. Power Current – Imp (A)	8.68
Open Circuit Voltage – Voc (V)	22.59
Short Circuit Current – Isc (A)	9.14
<i>* NOCT: irradiance 800W/m<sup>2</sup>, AM 1.5G, ambient temperature 20 °C, wind speed 1 m/s</i>	
Peak Power – Pmax (W)	119
Max. Power Voltage – Vmp (V)	17.24
Max. Power Current – Imp (A)	6.91
Open Circuit Voltage – Voc (V)	21.24
Short Circuit Current – Isc (A)	7.32
Max. System Voltage (V)	1000
Max. Series Fuse Rating (A)	15
Power Tolerance	0 ~ +3%
Pmax Temp. Coefficients (W/ °C)	-0.400%
Voc Temp. Coefficients (V/ °C)	-0.290%
Isc Temp. Coefficients (A/ °C)	+0.048%
NOCT Nominal Operating Cell Temp (°C)	45±2
Operating & Storage Temp. (°C)	-40 ~ +85

# SYMMETRY Product Specifications

160 Watts

SY2-M160W/LH4



## Mechanical Specifications

Model Number	SY2-M160W/LH4
Cell Type	Mono-crystalline
No. of Cells	36 (4x9)
Module Dimensions	1475 x 670 x 35mm
Weight	11.0kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction Box	IP65 Rated
Output Cable	2 x 0.9m long 2.5mm <sup>2</sup> cable (UV resistant)
Connectors	2 x LH4 male & female connectors (30 amps)
Carton Dimensions	1490 x 705 x 45mm

## Product Standards

Product Performance	IEC61215
Product Safety	IEC61730
Warranty	Workmanship & materials; 5 years

## Product Dimensions (mm)

