

Drypower

VRLA AGM MULTIPURPOSE RANGE
BACKUP & MAIN POWER



12V

30Ah

SLA

AGM

12SB30P

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity		
20 hour rate (1.50A to 10.50V)	30Ah	
10 hour rate (2.85A to 10.50V)	28.5Ah	
5 hour rate (5.10A to 10.20V)	25.5Ah	
1C (30A to 9.60V)	17Ah	
3C (90A to 9.60V)	12Ah	
Weight	Approx. 9.3kg	
Internal Resistance (at 1KHz)	Approx. 9.4mΩ	
Maximum Discharge Current (5 secs)	450A	
Charge Methods at 25°C		
Cycle Use		
Charging Voltage	14.4V to 15.0V	
Coefficient	-5.0mV/°C/Cell	
Maximum Charging Current	9A	
Standby Use		
Float Charging Voltage	13.5V to 13.8V	
Coefficient	-3.0mV/°C/Cell	
Operating Temperature Range		
Charge	-15°C to 40°C	
Discharge	-15°C to 50°C	
Storage	-15°C to 40°C	
Charge Retention (Shelf Life) at 20°C		
1 month	92%	
3 months	90%	
6 months	80%	
Case Material	ABS UL94 HB	
Termination	F6 (M5 Bolts)	

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value M5: 4 N-m (41kgf-cm)
Max. Allowable Torque Value M5: 6 N-m (61kgf-cm)

Design Life 3-5 years

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520321




DIMENSIONS

mm (inch)

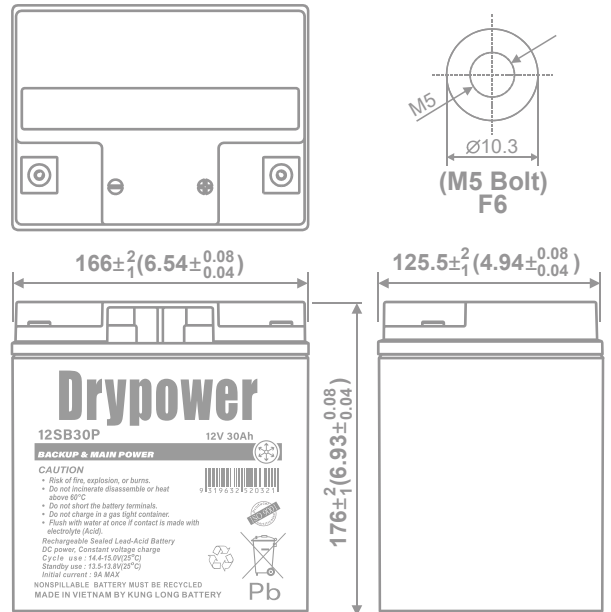


(V) FOR 12V BATTERY **Discharge Time VS. Discharge Current (25°C)**

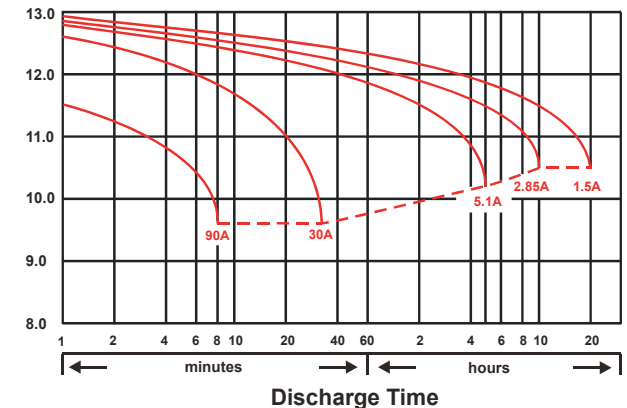


CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

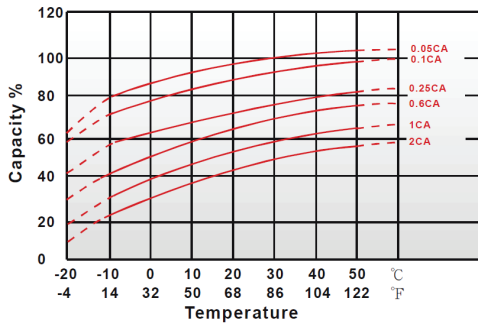


Capacity Retention Characteristic

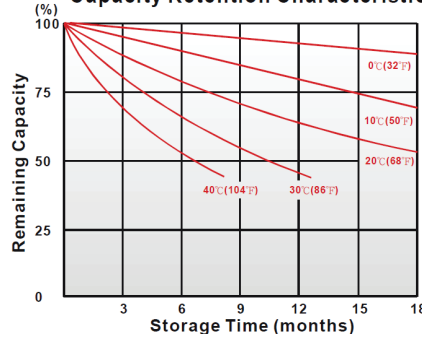

Cycle Service Life

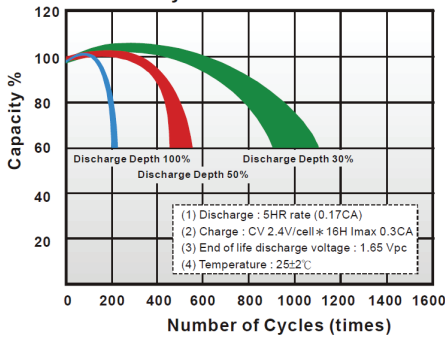

Trickle (or float) Service Life



FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Excellent charge retention in storage.
- ◆ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam.

KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025.

KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	141	177	198	209	213	217	222
10	min	108	124	135	142	146	149	153
15	min	94.4	105	110	114	116	117	119
30	min	58.4	63.1	65	66.5	66.8	67.4	68.1
60	min	34.4	37.1	38.5	39.5	39.8	40.4	40.9
120	min	20.3	21.7	22.5	23.2	23.3	23.7	24
180	min	15.5	16.1	16.4	16.7	16.8	17	17.2
240	min	12.7	13.2	13.5	13.7	13.7	13.8	14
300	min	10.4	10.9	11.1	12.1	11.3	11.4	11.5
600	min	5.81	6.02	6.17	6.3	6.33	6.39	6.45
1200	min	3.13	3.26	3.33	3.38	3.4	3.44	3.47

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	75.3	96.7	110	118	121	124	128
10	min	56.4	65.5	71.8	77	78.8	81	83.4
15	min	48.6	54.4	57.1	59.7	60.6	61.4	62.7
30	min	29.3	31.8	32.9	33.8	34.1	34.5	34.9
60	min	16.9	18.3	19.2	19.8	20	20.2	20.4
120	min	10.4	10.9	11.3	11.6	11.7	11.8	11.9
180	min	7.51	7.83	8.04	8.21	8.28	8.35	8.46
240	min	6.12	6.41	6.54	6.66	6.7	6.74	6.81
300	min	5.09	5.34	5.46	5.55	5.59	5.63	5.68
600	min	2.81	2.92	3	3.06	3.08	3.11	3.14
1200	min	1.52	1.57	1.61	1.64	1.65	1.67	1.69

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

May2022

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.