


# Base Chassis

Balance 20X	
WAN Interface	1 x GE, 1x Embedded LTE Modem 1x USB Interface 1x Expansion Module (Optional)
SpeedFusion Hot Failover	● ^
SpeedFusion WAN Smoothing	● ^
SpeedFusion Bandwidth Bonding	● ^
Number of PepVPN SpeedFusion Peers	2/5 !
LAN Interface	4x GE
Wi-Fi Interface	Simultaneous 802.11ac wave 2/ac/a/n and 802.11b/g/n
Stateful Firewall Throughput	900Mbps
PepVPN / SpeedFusion Throughput	No Encryption: 100Mbps 256-bit AES: 60 Mbps
Recommended Users	1-60
Downlink/Uplink Datarate	150Mbps/50Mbps (LTE Modem)
IP Passthrough	●
Antenna Connectors	2x SMA Antenna Connectors 2x RP-SMA Wi-Fi Antenna Connectors 1x GPS SMA Antenna Connectors
Power Input	DC Jack: 10V - 30V
Power Consumption	6.83 W (nominal, with FlexModule Mini LTEA) 28 W (max.)
Dimensions	6.3 x 10.3 x 1.3 inches 160 x 262 x 33 mm
Weight	1.74 pounds / 0.67 kg
Operating Temperature	14° – 113°F / -10° – 45°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS
Warranty	1-Year Limited Warranty
Package Content	Balance 20X, 12V3A Power Supply (ACW-602), 2x LTE Antennas (ACW-813 or ACW-234) 1x GPS Antenna (ACW-232) 2x Wi-Fi Dual Band Antennas (ACW-341)

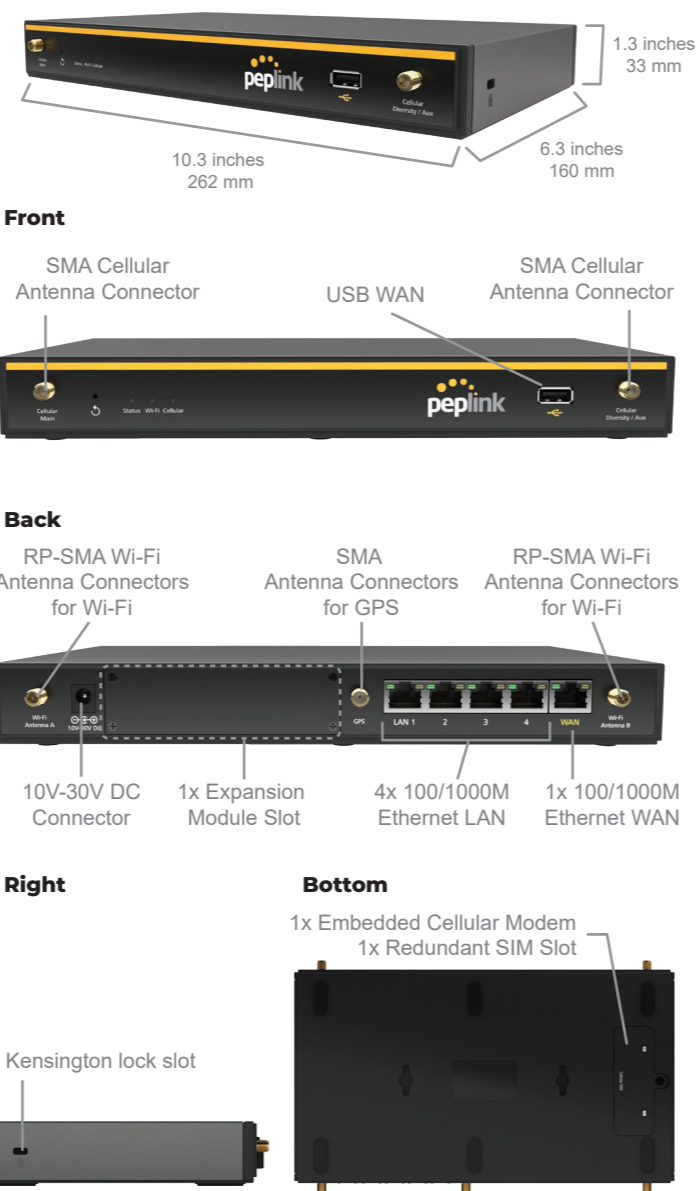

^ Requires PrimeCare Subscription, complimentary for the first year.  
! 2 PepVPN Peers are enabled by default. 5 PepVPN Peers are enabled with PrimeCare Subscription, complimentary for the first year.

# Peplink Balance 20X

## Futureproof SD-WAN Router for Small Businesses and Branches



### Add Cellular Backup

Back up your xDSL with a cellular link (up to two with the FlexModule Mini) and redundant SIM cards. When a line goes down, your office won't even notice.



### Need Another LTE?

The Balance 20X has a FlexModule Mini slot which will support all kinds of WAN technology. So when it's time to add a second LTE connection, the Balance 20X will be ready.

## Ordering Information

Product Code	Description
BPL-021X-LTE-E-T-PRM	Balance 20X, 1x GE WAN ports, 4x GE LAN ports and 1x LTE modem (CAT-4)
BPL-021X-LTE-US-T-PRM	Balance 20X, 1x GE WAN ports, 4x GE LAN ports and 1x LTE modem (CAT-4)
BPL-021X-LTE-MX-T-PRM	Balance 20X, 1x GE WAN ports, 4x GE LAN ports and 1x LTE modem (CAT-4)

## Feature Add-on

Product Code	Description	Product Code	Description
PRM-BPL-021X-LTE-1Y	1 Year PrimeCare Subscription	PRM-BPL-021X-LTE-4Y	4 Year PrimeCare Subscription
PRM-BPL-021X-LTE-2Y	2 Year PrimeCare Subscription	BPL-021X-LC-VWAN	Balance 20X Virtual WAN Activation License


## Bands

	Product Code	Carrier/Category	Embedded Modems	4G Bands	3G Bands
LTE	BPL-021X-LTE-E-T-PRM	Europe / International / CAT-4	1	B1, B3, B5, B7, B8, B20, B38, B40, B41	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8
	BPL-021X-LTE-US-T-PRM	Americas / FirstNet / CAT-4	1	B12, B14, B4, B2, B5, B13, B66, B71	B2, B4, B5
	BPL-021X-LTE-MX-T-PRM	Latin America/Australia CAT-4	1	B1, B2, B3, B4, B5, B7, B8, B28, B40	WCDMA/HSPA+/DC-HSPA+: B1, B2, B5, B8

## Better with PrimeCare



### SpeedFusion + InControl<sup>2</sup> + Warranty

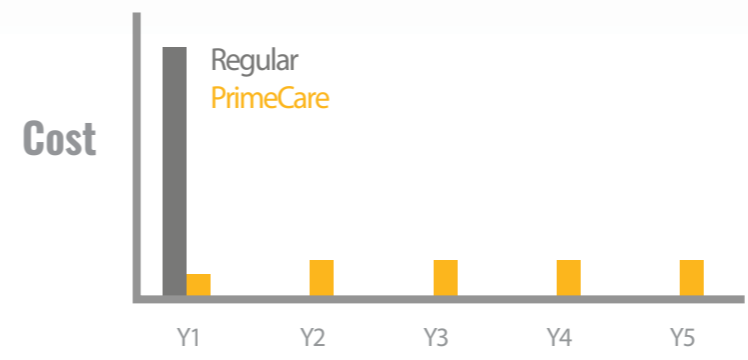

**Everything's Included:** PrimeCare includes everything you need to provide your office with unbreakable, scalable connectivity.

**Pay Less Upfront:** PrimeCare lowers the entry cost of getting the device you want. Annual subscription gets you a wide range of services.